

F

E



D

C

B

A

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		DWG. NO. TO REVISE	S.T.CHU	30-9-2003

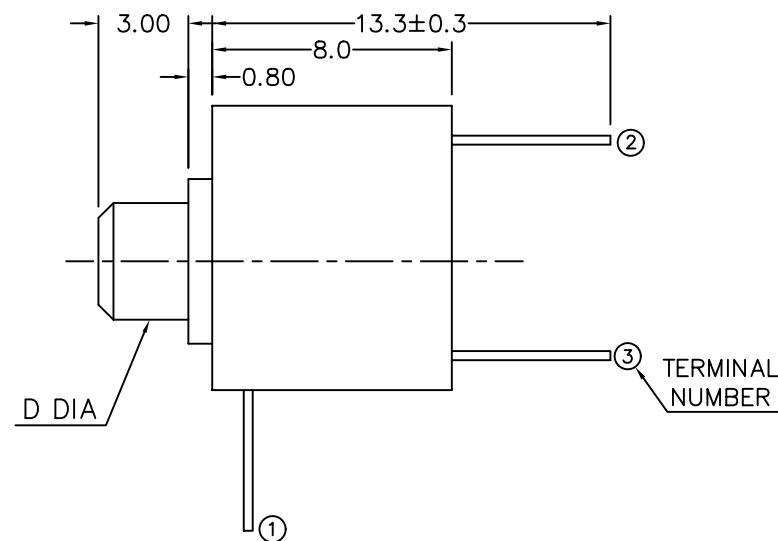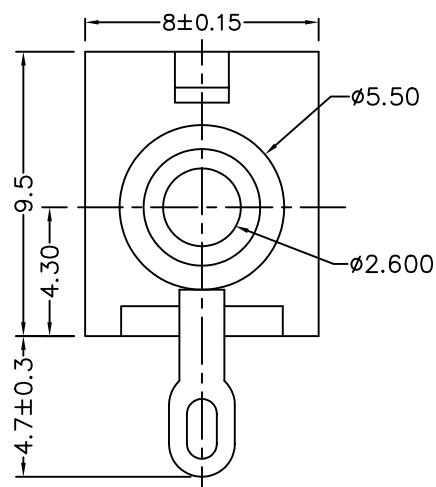

MODEL NO.	TG-25N	TG-25F
D DIA	THREADED M4X0.5	FLASHED ø4.0
SCHEMATIC		

* MATERIAL

TERMINAL 1 : BRASS
 TERMINAL 2 : COPPER ALLOY
 TERMINAL 3 : BRASS
 BUSHING : BRASS
 HOUSING : PBT

SPECIFICATIONS

- 1 Insulation resistance of adjacent open terminals shall not be less than 50 Megohms when measured with 500 Volts resistance meter.
- 2 Connector shall withstand 500 Volts (RMS) between adjacent open terminal for one minute.
- 3 Contact resistance of normally closed terminals shall not exceed 0.03 ohms when measured at a current of one Ampere by Voltage drop method.
- 4 Connector shall withstand 5,000 cycles of insertions and withdrawal with testing plug, contact resistance shall not exceed 0.1 ohm.

JOYNet Enterprise Co., Ltd.

 Technology

 Profession

 Service

DESIGN	K.Y.AU-YEUNG	DATE	30-9-2003	SCALE	4:1
DRAWING	K.Y.AU-YEUNG	DATE	30-9-2003	MATERIAL	*
CHECK		DATE		DWG. NO.	TZ\TG25-PBT
APPROVAL		DATE		SHEET	

PART NAME 2.5mm PHONE JACK

TOLERANCE UNLESS 0.0±0.2
 0.00±0.1
 OTHERWISE SPECIFIED: 0.000±0.05

UNIT: mm



PART NO. TG-25

F

E

D

C

B

A

DCF-04/A