ZONE	SYMBOL	REVISION	APPROVAL	DATE

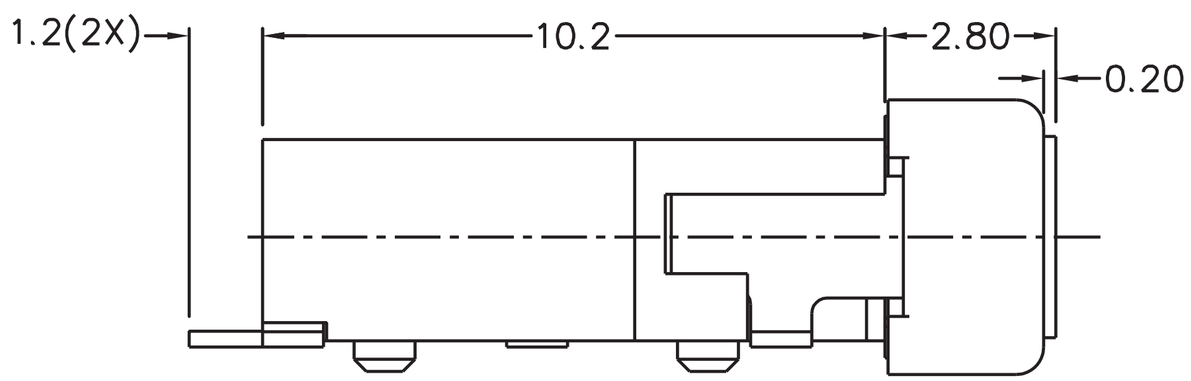

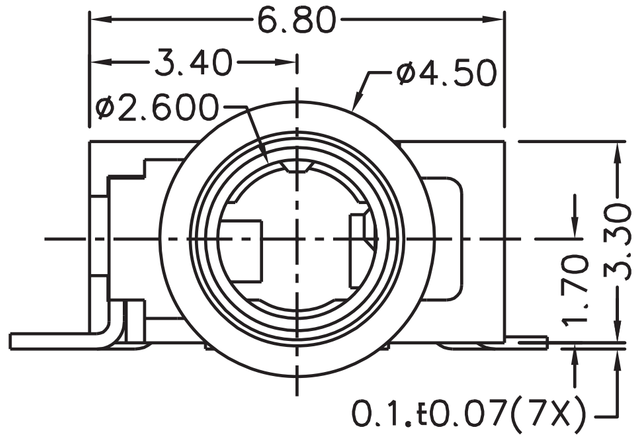

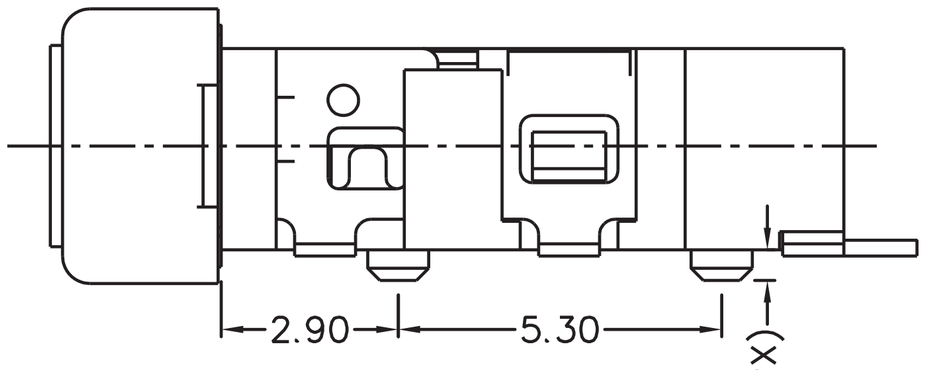

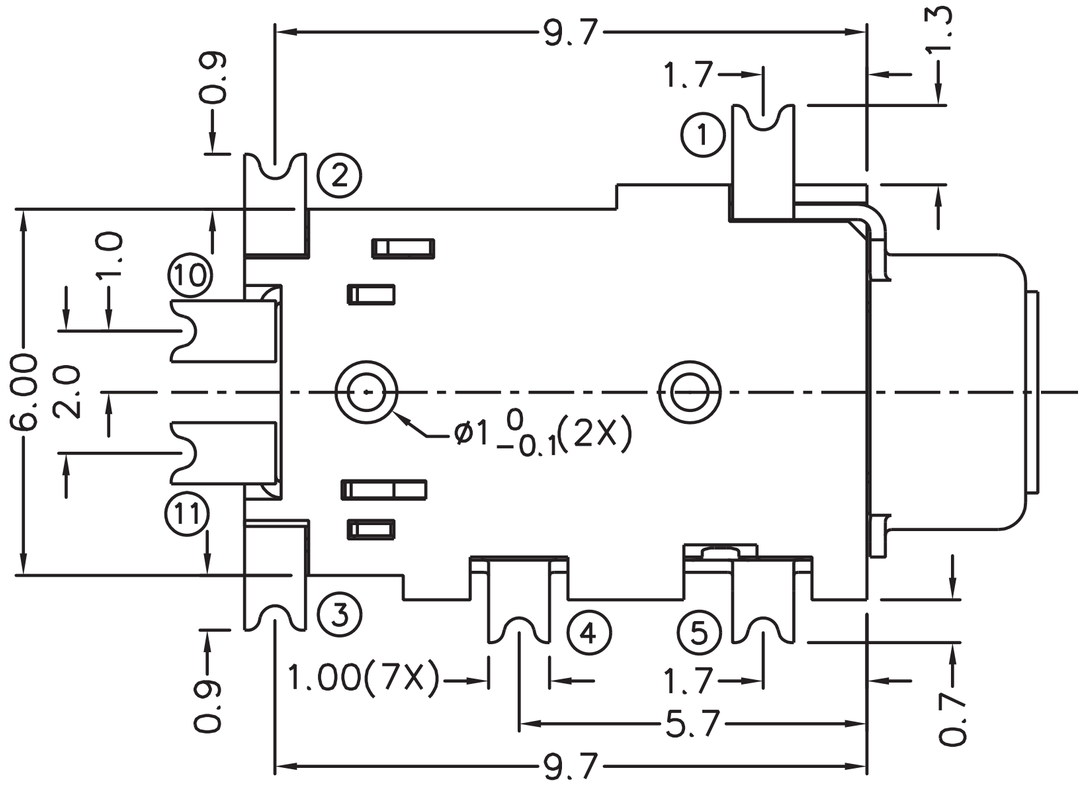

* MATERIAL

TERMINAL 1	: BRASS
TERMINAL 2	: COPPER ALLOY
TERMINAL 3	: COPPER ALLOY
TERMINAL 4	: COPPER ALLOY
TERMINAL 5	: COPPER ALLOY
TERMINAL 10	: BRASS
TERMINAL 11	: BRASS
HOUSING	: PA6T

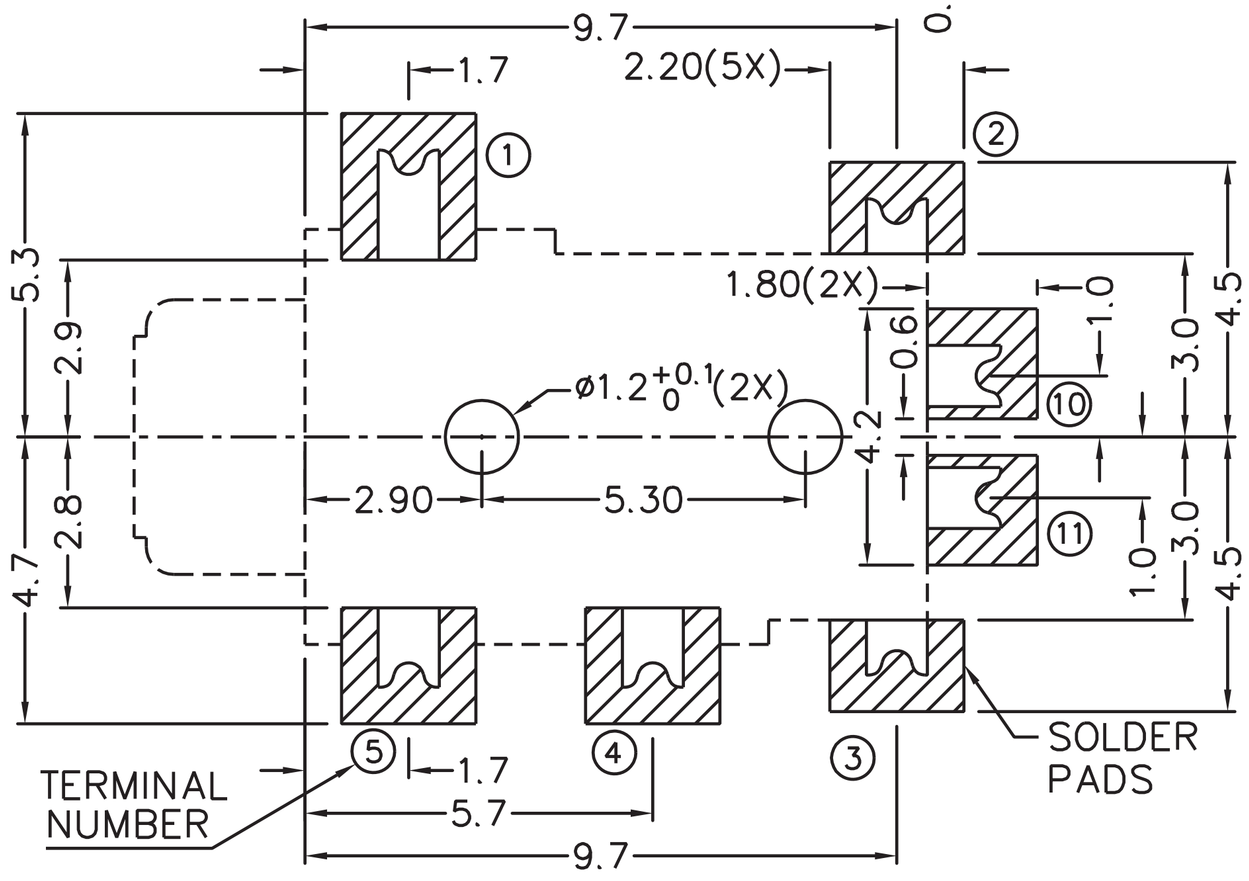

RECOMMENDED
SOLDER PAD LAYOUT

MODEL NO.	TG-2887D	TG-2886AD	TG-2886BD	TG-2885D
SCHEMATIC	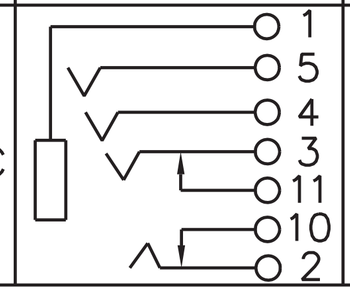			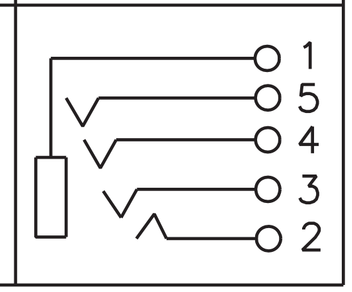

SPECIFICATIONS

1 Insulation resistance of adjacent open terminals shall not be less than 50 Megohms when measured with 500 Volts resistance meter.
2 Connector shall withstand 500 Volts (RMS) between adjacent open terminal for one minute.
3 Contact resistance of normally closed terminals shall not exceed 0.03 ohms when measured at a current of one Ampere by Voltage drop method.
4 Connector shall withstand 5,000 cycles of insertions and withdrawal with testing plug , contact resistance shall not exceed 0.1 ohm.

JOYNet Enterprise Co.,Ltd.

DESIGN	J.X.KUANG	DATE	15-7-2004	SCALE	5:1		
DRAWING	J.X.KUANG	DATE	15-7-2004	MATERIAL	*		
PART NAME	2.5mm SMD STEREO JACK	TOLERANCE UNLESS OTHERWISE SPECIFIED: 0.0±0.2, 0.00±0.1, 0.000±0.05	UNIT: mm	CHECK		DATE		DWG. NO.	TZ\TG288D-PA6T
PART NO.	TG-288D			APPROVAL		DATE		SHEET	

DCF-04/A