
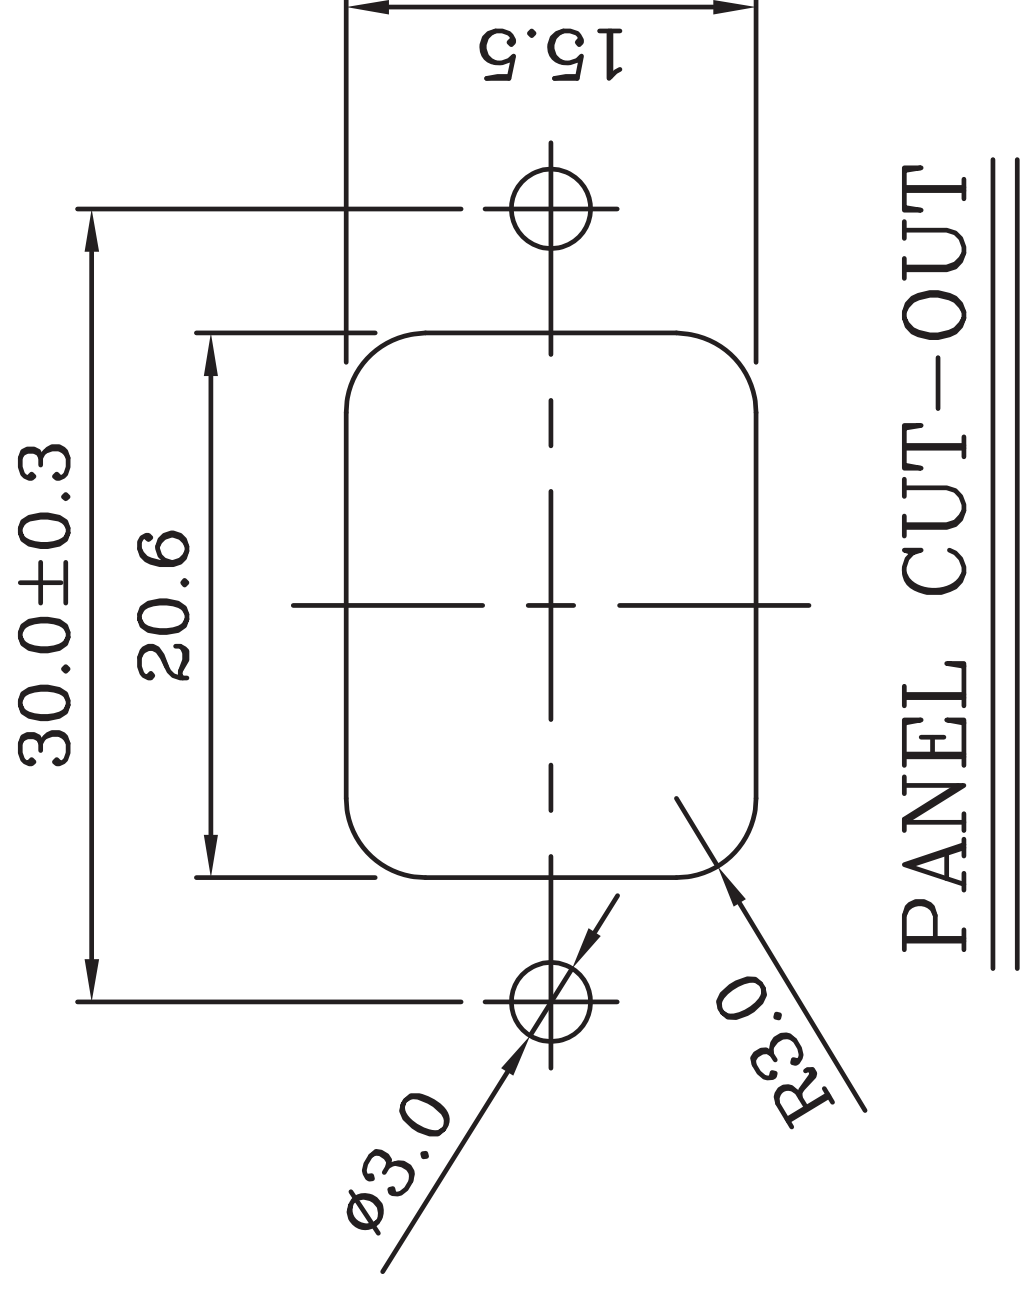


**INSERT NUT (M2.5x0.45)**

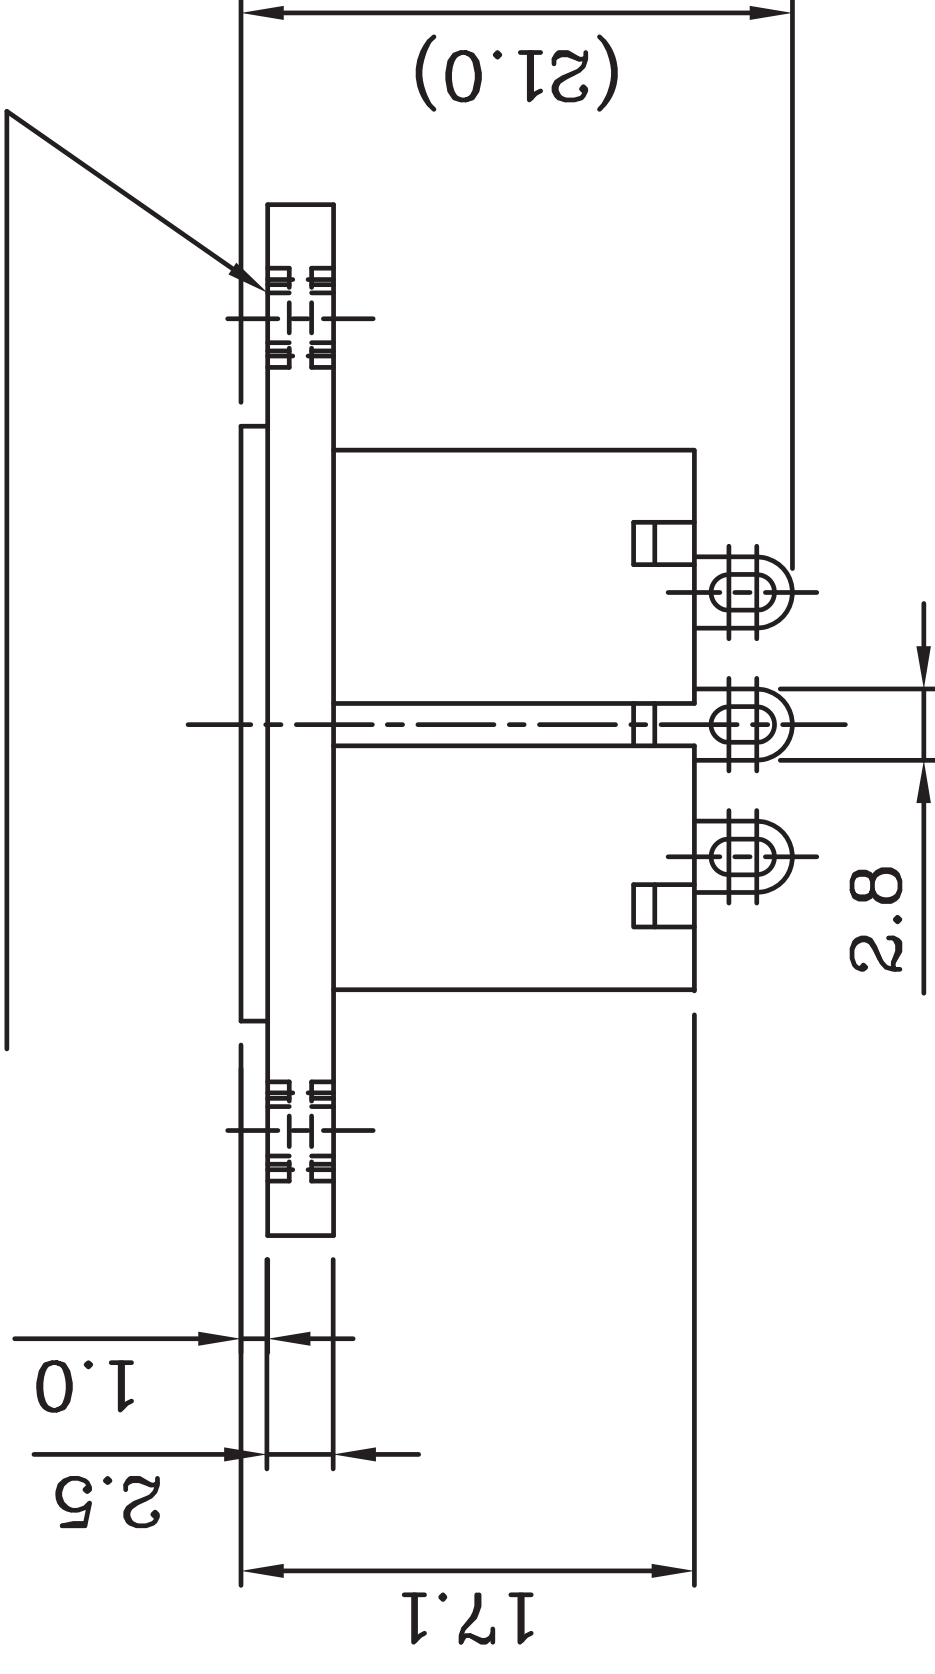

**SPECIFICATION:**

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
ENEC	ENEC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

	DRAWN BY	UNIT	UNIT QTY	SCALE	TOLERANCE	PRODUCT NO.	REV
	李 2010.8.28 小英	mm	1	1:1	X.XX±0.1 XX.XX±0.2 XXX.XX±0.3	R-307(B00)	
APPROVED BY		ID NO		INTERIM NO.		NEW NO.	
				10082801Q		B	